

# IDentity 5100



## IDentity 5100 ETSI

Ultra High Frequency 865 - 868 MHz  
High-Performance AVI Reader

### Overview

Supporting unique design innovations and advancements in RFID technology, the IDentity 5100 redefines the world of AVI readers, eliminating cost barriers to address large-scale opportunities such as the emerging Electronic Vehicle Registration (EVR), vehicle emissions validation and insurance compliance markets, in addition to other traditional AVI applications such as electronic tolling and parking control.

With its high-speed performance and extended read range, the IDentity 5100 system is ideally suited for global transportation applications, eliminating the manual, visual-based inspection associated with current systems, and enabling system operators to identify vehicles with appropriate authorizations from a distance, while the vehicle is in motion.

This powerful UHF integrated reader & antenna system features best-in-class air interface performance while the robust, software-based architecture provides a rich application platform that addresses the needs of global deployments, ensuring that features and capabilities can be added as RFID technology continues to evolve.

The IDentity 5100 was designed to withstand extreme weather conditions, temperatures, humidity and vibration, while providing optimal performance in European and Asia-Pacific environments and other ETSI regulated regions.




# IDentity 5100 ETSI

## High-Performance, Multi-Protocol Reader



### Specifications

Frequency:	UHF 865 to 868 MHz (Factory configured for specific region)
Supported Protocols:	Fully supports ISO18000-6C, ISO18000-6B, iPx (Supertag), ISO10374, and EASAlarm protocols. Additional protocols may be supported through firmware updates.
Operating Modes:	Single Read Point Mode Dual Read Point Mode (with external antenna)
Communications:	10/100 Ethernet Port
RF Power:	10 mW - 560mW conducted (+27.5 dBm)
Input Power:	12 to 24 Vdc
Power Consumption:	13W at idle; 30W typical at 560mW; 36W max at 560mW
Connections:	RS-232, Digital I/O, Ethernet LAN; also 1 - RP-TNC (reverse polarity) for external antenna connection
Upgradeable Firmware:	Yes
Operating Temperature:	-40°C to +55°C (-40°F to 131°F)
Storage Temperature:	-40°C to +85°C (-40°F to 185°F)
Relative Humidity:	100%, condensing
Dimensions (LxWxD):	30.5 x 30.5 x 10.2 cm (12 x 12 x 4.0 in.)
Weight:	~4.8 kg (10.5 lbs)
Regulatory:	Compliant to ETSI EN302208
Case Material:	To be determined by environment requirements. Aluminum cast, IP67 rated.

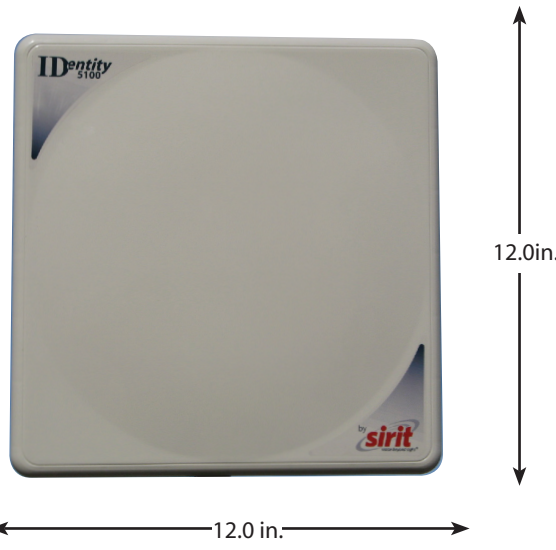

IDentity 5100 ETSI Reader

SIRIT - CANADA  
372 Bay Street, Suite 1100  
Toronto, ON M5H 2W9 Canada  
Tel: 416.367.1897  
Fax: 416.367.1435

SIRIT - DALLAS  
1321 Valwood Parkway, Suite 620  
Carrollton, Texas 75006 USA  
Tel: 972.243.7208  
Fax: 972.243.8034

SIRIT - SAN DIEGO  
901 Lane Avenue, Suite 100  
Chula Vista, California 91914 USA  
Tel: 619.656.2515  
Fax: 619.872-0662

SIRIT - RALEIGH/DURHAM  
1000 Perimeter Park Drive, Suite E  
Morrisville, North Carolina 27560 USA  
Tel: 919.281.1541  
Fax: 919.281.1551

For more information,  
contact sales toll free  
at 1.866.338.9586

E-mail: [sales@sirit.com](mailto:sales@sirit.com)



### About Sirit Inc.

Sirit Inc. (TSX: SI) is a leading provider of Radio Frequency Identification (RFID) reader technology to OEMs and solution providers worldwide. Harnessing the power of Sirit's enabling-RFID technology, customers are able to more rapidly bring high quality RFID solutions to the market with reduced initial engineering costs. Sirit's products are built on more than 14 years of RF domain expertise addressing multiple frequencies (LF/HF/UHF), multiple protocols and are compliant with global standards. Sirit's broad portfolio of products and capabilities are easily customized to address new and traditional RFID market applications including Supply Chain & Logistics, Cashless Payment, Access Control, Automatic Vehicle Identification, Inventory Control & Management, Asset Tracking and Product Authentication. For more information, visit [www.sirit.com](http://www.sirit.com).

**RFID by sirit** The "RFID by Sirit" symbol signifies that Sirit Inc.'s high quality RFID reader technology resides within this product.

© 2008 Sirit Inc., all rights reserved. "Sirit", the Sirit Design, "RFID by Sirit", the RFID by Sirit Design and "vision beyond sight" are all trademarks of Sirit Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice.