

FEATURES

- Supports leading HF smart labels
Reads/writes different tags and smart labels via a single module
- Single connection to serial interface and power supply
Connects easily to existing devices
- Standard baud rate and serial level
Permits plug and play interfacing to a wide range of devices
- Secure firmware download facility via the serial interface
Allows field upgrades for future firmware releases
- Factory adjustable antenna output power
Enables the product to comply with local regulations

TAGS SUPPORTED

ISO 15693
Inside PicoTag™
Philips UID
Philips I-CODE
Microchip MCRF355/360
TI-RFID™ Tag-it™
EPCglobal™ HF

INfinity 168

High Frequency 13.56 MHz RFID & Smart Label OEM Reader Module

Overview

The INfinity 168 is a versatile RFID reader component that supports most leading 13.56 MHz tags and smart labels. Based on the popular Sirit INfinity 166 reader, the INfinity 168 reader module has been modified to meet specific OEM requirements. Its compact design provides versatility and easy integration within a wide range of industrial automation products.



Connection to the INfinity 168 is made via a single connector, which provides the board with power and provides an easy way to connect to existing devices. In addition, to enable future upgrading of new tag types and code enhancements, firmware can be flash upgraded through the serial interface. This permits the product to be easily updated in its surrounding environment.

Applications

Typical applications for the INfinity 168 include industrial printers for the programming of smart labels at source, non life-critical medical applications, product verification and access control.

INfinity 168

13.56 MHz RFID & Smart Label Reader Module



Performance Characteristics

Frequency:	HF Band, 13.56 MHz
Supported Transponders:	ISO 15693, Inside PicoTag, Philips UID, Philips I-CODE, Microchip MCRF355/360, TI-RFID Tag-it, EPCglobal HF
Communications Protocol:	Serial packet based with proprietary error detection
Communications Parameters:	38400
Communications Signal Level:	TTL level (factory set)
Interface Connector:	Single 10-way Molex connector for power and communications
Antenna Type:	External. Impedance: 50 ohms at 13.56 MHz, Q: 10 - 25)
Upgradeable Firmware:	Yes


Physical Characteristics

Dimensions (LxWxD):	70.0 x 51.5 x 12.3 mm (2.76 x 2.03 x 0.48 in.)
Weight:	18 g (0.63 oz.)
Mounting:	4 corner-mounted holes of 2.8 mm (0.11 in.)

Environment

Operating Temperature:	0°C to +80°C (32°F to 176°F)
Storage Temperature:	-40°C to +85°C (-40°F to 185°F)
Relative Humidity:	80%, non-condensing
Power:	
Input Voltage:	+5 VDC \pm .2 VDC, <50 mV ripple
Active Current:	200 mA (antenna dependent)
Standby Current:	Negligible
Idle:	60 mA
RF Output Power:	120 mW max
Regulatory:	EN 300 330-1 (radio type approval), EN 300 489-3 (EMC), Pre compliance to FCC part 15

Model:

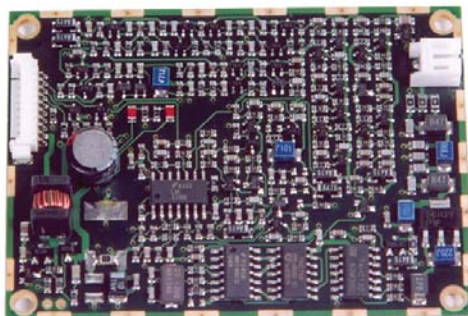

INfinity 168 HF Reader Module

About Sirit Inc.

Sirit Inc. (TSX: SI) is a leading provider of Radio Frequency Identification (RFID) reader technology to OEMs and solution providers worldwide. Harnessing the power of Sirit's enabling-RFID technology, customers are able to more rapidly bring high quality RFID solutions to the market with reduced initial engineering costs. Sirit's products are built on more than 13 years of RF domain expertise addressing multiple frequencies (LF/HF/UHF), multiple protocols and are compliant with global standards. Sirit's broad portfolio of products and capabilities are easily customized to address new and traditional RFID market applications including Supply Chain & Logistics, Cashless Payment, Access Control, Automatic Vehicle Identification, Inventory Control & Management, Asset Tracking and Product Authentication. For more information, visit www.sirit.com.

SIRIT - CANADA
 372 Bay Street, Suite 1100
 Toronto, ON M5H 2W9 Canada
 Tel: 416.367.1897
 Fax: 416.367.1435

SIRIT - USA
 1321 Valwood Parkway, Suite 620
 Carrollton, Texas 75006 USA
 Tel: 972.243.7208
 Fax: 972.243.8034

For more information,
 contact sales toll free
 at 1.866.338.9586

E-mail: sales@sirit.com

www.sirit.com



The "RFID by Sirit" symbol signifies that Sirit Inc.'s high quality RFID reader technology resides within this product.

© 2005 Sirit Inc., all rights reserved. "Sirit", the Sirit Design, "RFID by Sirit", the RFID by Sirit Design and "vision beyond sight" are all trademarks of Sirit Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice.